




- [About Us](#)
- [Contact Us](#)
- [ENT Equipment](#)
- [Hospital Use](#)
- [Infant Care](#)
- [Laboratory](#)
- [Monitoring Devices](#)
- [Operation Lamps](#)
- [Operation Table](#)
- [Refrigerator](#)
- [Rehabilitation](#)
- [Respiratory](#)
- [Sterilizers](#)
- [Suction Unit](#)



D&E Dynamic & Evolution International Corporation
D&E Int'l Corp.



OLH11-003

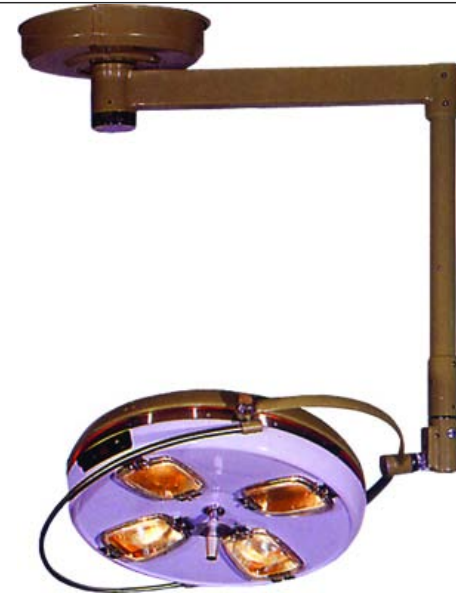

OLH11-004



OLH11-005



OLH11-006



**Single Head Ceiling Mounted
Surgical Operation Lamp
OLH11 - series**

Model	OLH11-003	OLH11-004	OLH11-005	OLH11-006	OLH11-007	OLH11-008	OLH11-010	OLH11-012
Number of Bulb	3 Bulbs	4 Bulbs	5 Bulbs	6 Bulbs	7 Bulbs	8 Bulbs	10 Bulbs	12 Bulbs
Type of Bulb	24v. 50 watts							
Light Intensity in Lux	55000 Lux	70000 Lux	90000 Lux	110000 Lux	125000 Lux	145000 Lux	160000 Lux	180000 Lux
Color Temperature	4200° ± 200°K							
Power Consumption	150w	200w	250w	300w	350w	400w	500w	600w
Electrical Connection input	110v, 7A or 220v, 5A							
Diameter of Lamp head	45cm	63cm	63cm	63cm	75cm	75cm	91cm	91cm
Diameter of Reflector	14cm							
Color Rendition Index	90							
Diameter of Illuminated Field at 1m.	12cm	14cm	15cm	15cm	20cm	20cm	20cm	20cm
Brightness Adjustment	Continuous 0% ~ 100%							
Depth of Illuminated Field	30cm	35cm	40cm	40cm	45cm	45cm	50cm	50cm
Swivel Radius (approx.)	80cm	80cm	90cm	90cm	90cm	100cm	120cm	120cm
Height Adjustment of Lamp head	55cm							
Minimum Ceiling Height	250cm							

Absorption of Infrared Radiation	96%
Focus Controller by Manual	Located on the side of the lamp head
Transformer	110v, 24v or 220v, 24v
Intensity Controller by Manual	Located on the lamp head

00013860