

Kymographs & Accessories

Kymograph Accessories



Previous



Next

Table of Contents

Product Index

Search

Home


Contact Us



Previous




Next

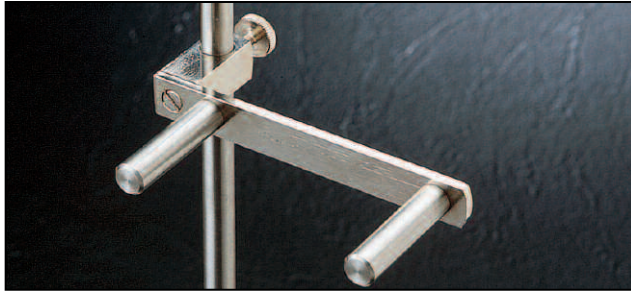

Double Pulley Holder

Mounts on the standard 9.5 mm (3/8 in) diameter rod.

Catalog No.	\$	Product
BS4 50-0702		Double Pulley Holder

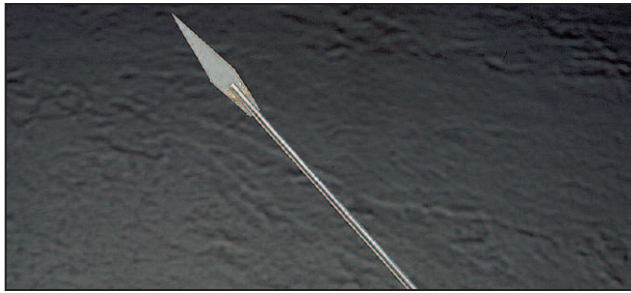

Aluminum Lever with Point

This Light Aluminum Lever is 22.5 cm (9 in) long and has a plastic point.

Catalog No.	\$	Product
BS4 50-6436		Aluminum Lever with Point




BS4 50-6006
Round Edge Cup Receiver

Cup Receivers

These moulded plastic cup receivers are for recording the pulse from an artery. The cup receiver is pressed over the limb at artery site and small changes in volume in the cup are transmitted through flexible tubing to a read-out device, such as a Tambour, see page I153. The rifled tube connector on back has an inside diameter of 3 mm (1/8 in). The cup is 45 mm (1-3/4 in) diameter and 6.5 mm (1/4 in) deep. It is available in two shapes: round and with a flattened edge for getting into hard-to-reach spots.


Catalog No.	\$	Product
BS4 50-6006		Cup Receiver, Round
BS4 50-6014		Cup Receiver, Flat Edge

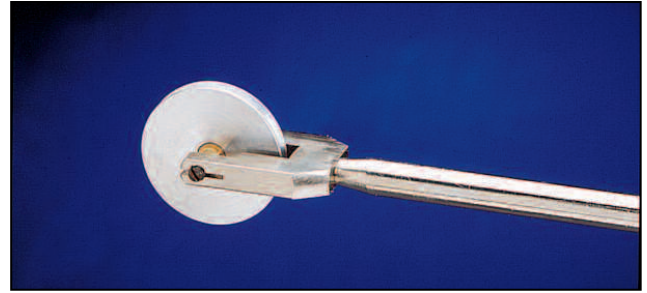

Stem Mount Pulley

Grooved 25 mm (1 in) diameter wheel mounted in needle bearings.

Catalog No.	\$	Product
BS4 50-2666		Stem Mount Pulley

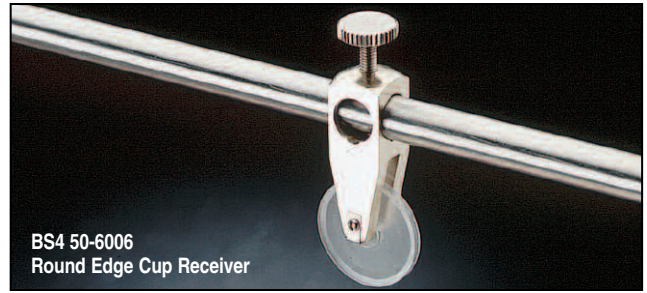


BS4 50-6006
Round Edge Cup Receiver

Fixed Mount Pulley

Light weight plastic wheel with deep groove. Negligible friction since pulley runs on hard steel spindles. Mounts on standard 9.5 mm (3/8 in) rod.

Catalog No.	\$	Product
BS4 50-0710		Fixed Mount Pulley, 25 mm

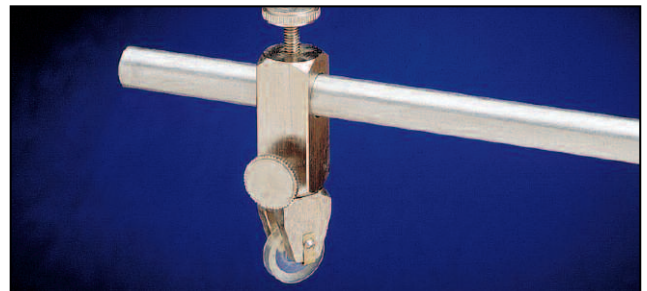

Swivel Mount Pulleys

Light weight plastic wheel with deep groove. Swivels Negligible friction since the Pulley runs on hard steel spindles. Mounts on standard 9.5 mm (3/8 in) diameter rod. Available in three sizes.

Catalog No.	\$	Product
BS4 50-2708		Swivel Mount Pulley, 15 mm (5/8 in)
BS4 50-2716		Swivel Mount Pulley, 25 mm (1 in)
BS4 50-2724		Swivel Mount Pulley, 35 mm (1-1/2 in)

