


Rear cartridge access door

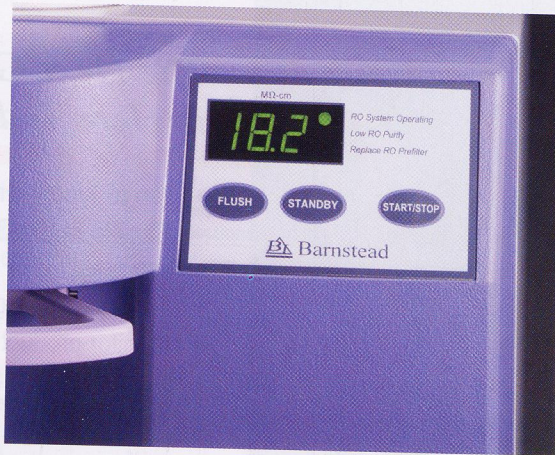

Microprocessor-controlled display

### PRODUCT SPECIFICATIONS

Overall Dimensions Inches (cm)			Pressure psig (bar)	Inlet Water Temperature °F (°C)	Voltages	Flow Rate
W	H	D				
12 (30.5)	18 (46)	19 (48.3)	30-80 (2-5.5)	34-95 (1-35)	100-240 VAC	<= 800 ml/min.

### ORDERING INFORMATION

Model #	Description	Shipping Weight Lb. (kg)
D13321	EASYpure RoDi	35 (15.8)

### ACCESSORIES AND CARTRIDGES

Model #	Description
D502132	EASYpure RoDi Start Up Kit*
D502133	Cartridge Kit
D3750	0.2 Micron Final Filter
D7034	Set of 3 Empty Cartridges used for Cleaning
LXM13	Ultraviolet Lamp
AY1332X1	External Booster Pump
AY1332X2	Pre-Filtration Accessory Kit
D13324	Wall Mounting Bracket

\*Start-up kit required