


ELECTRO-ACUPUNCTURE

IC-4107

FOUR-CHANNEL ELECTRO-ACUPUNCTURE WITH POINT DETECTOR

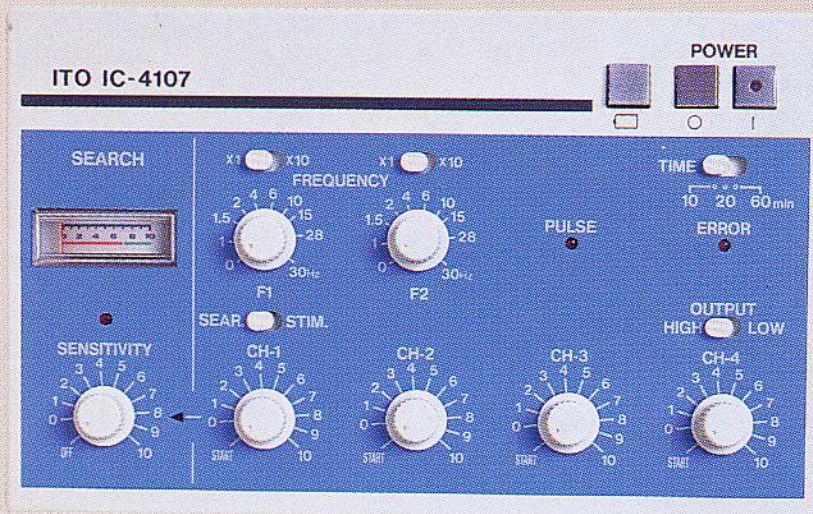

- The latest development—most advanced unit on the market of compact electro-acupuncture
- Broad pulse rate range: from 1 to 300 Hz
- Three stimulation modes—Constant, Intermittent & Modulated
- Practical search electrode and search function
- Built-in timer: 10 minutes, 20 minutes and 60 minutes
- Automatic polarity conversion
- High/low intensity switching
- Battery monitor indicating residual power
- No output cross-over

SPECIFICATIONS:

Power: Six AAA batteries

Output Current/voltage: High/Low, switchable
Max.3.5 mA \pm 30%/15 V \pm 25%

Output Channels: 4 channels + 1 channel for point search

Pulse Rate: 1 ~ 300 Hz, variable

Pulse Width: 55 μ s \pm 25% at 300 Hz

Stimulation Mode: Constant, intermittent and modulated

Point Detection and Stimulation: Indicated by sound and meter.

Timer: 10, 20 and 60 minutes

Safety: ● Zero output start ● No output cross-over

Size & Weight: 200 x 126 x 35 mm, 450 g

Connect With Us



سوماتكو
SOMATCO
www.somatco.com

