



Multi Function Interfaces

RJ45 enables its connection with LAN (local area network), users can easily realise remote control of projector including settings, it is also available to check lamp time & status at any time.

1. VGA In & Out
2. RS232 Control
3. RJ45 LAN Access
4. Y-Cb/Pb-Cr/Pr
5. S-Video
6. Audio In
7. PC Audio In/Out

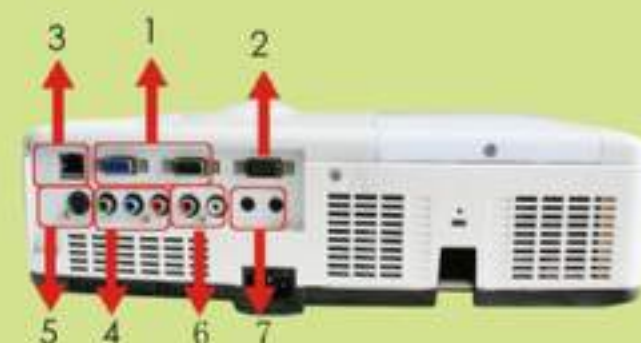

PROJECTION CHART

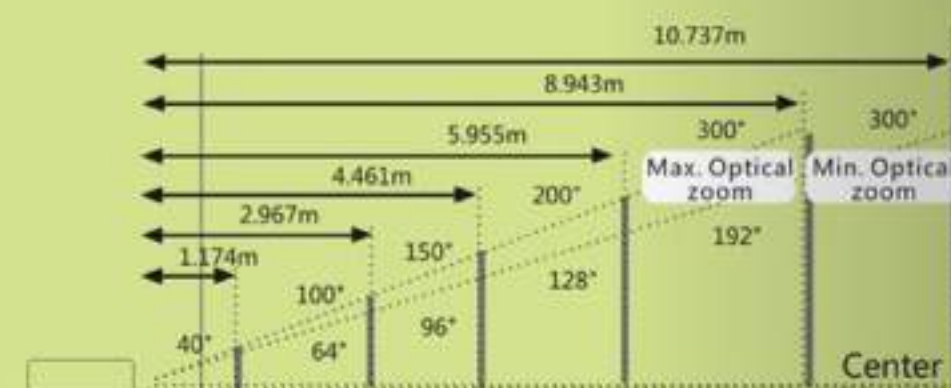

Projection Size

Diagonal (W×H) mm 4:3 Scale	40"	100"	150"	200"	300"
Max. Optical zoom	1.174m	2.967m	4.461m	5.955m	8.943m
Min. Optical zoom	1.413m	3.564m	5.358m	7.151m	10.737m

Model	LX645	LX650	LX660
Display Technology	3LCD 0.63"	3LCD 0.63"	3LCD 0.63"
Native Resolution	XGA (1024×768)	XGA (1024×768)	XGA (1024×768)
Brightness	3,000 Ansi lumens	3,500 Ansi lumens	4,000 Ansi lumens
Contrast	800:1	800:1	800:1
Uniformity	85%	85%	85%
Lamp	230W NSH	230W NSH	230W NSH
Dimension	345×245×94mm	345×245×94mm	345×245×94mm
N.W. & Color	3.20Kg / Pearl white/Silver grey/Black	3.20Kg / Pearl white/Silver grey/Black	3.20Kg / Pearl white/Silver grey/Black
Projection Type	Rear/Front/Ceiling/Desktop	Rear/Front/Ceiling/Desktop	Rear/Front/Ceiling/Desktop
Lamp Replacement	Top Cover Drawer Style	Top Cover Drawer Style	Top Cover Drawer Style
Lens	F: 2.3-2.5, 1.2x Optic zoom f=18.82-22.60mm 1/4-1.6 Digital focus function.	F: 1.75-1.9, 1.2x Optic zoom f=18.85-22.63mm 1/4-1.6 Digital focus function.	F: 1.58-1.75, 1.2x Optic zoom f=18.85-22.63mm 1/4-1.6 Digital focus function.
Outputs	15-Pin D-sub, RS232, Mini-Jack (Audio output), RJ45		
Inputs	S-video, Composite video, AV, 15-pin D-Sub x2, Mini Jack (Stereo), RCA (L/R)		
Video Compatibility	PAL, SECAM, NTSC 4.43, PAL-M, N, HDTV (480i, 480p, 575i, 575p, 720p, 1035i & 1080i)		
Resolution Compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA, Mac		
Scale Ratio	4:3 (Standard) / 16:9 (Compatible)		
Digital Keystone	Vertical +/-30° Auto correction		
Throw Ratio	70" @ 2.07m		
Speaker	Mono 7w		
Projection Distance	1.4m-12.7m		
Projection Size	40"-300"		
Noise	[Normal] <34dBA, [Eco] <29dBA		
Lamp life	[Normal] 3,000 Hrs, [Eco] 4,000 Hrs		
H. Scanning Freq.	15-100 Khz		
V. Scanning Freq.	50-100 Hz		
Power Consumption	280W	285W	310W
Power Supply	100-240V AC		
Performing Temp.	0°C-40°C		
Storage Temp.	-10°C-60°C		
OSD Language	17 Languages (English, Spanish, German, French etc)		
Standard Accessories	User manual, Power cord, Remote control & battery, VGA cable, lens cover, PIN code sticker		

Authorized Distributor:



Connect With Us



PROJECTION SPECIALIST SOMAPRO PROJECTOR

www.somatco.com

PROJECTION SPECIALIST SOMAPRO PROJECTOR

