

Rotators

Our rotators give gentle but effective mixing of biological samples to be held in 1.5mL to 50mL micro tubes, used in a variety of applications including immune precipitations, prevention of blood coagulation, latex diagnostics etc.



MX-RD-Pro

LCD Digital Rotator



MX-RD-Pro

With dish accessory



MX-RD-Pro

With dual dish accessories and support rods

MX-RD-Pro LCD Digital Rotator

Features:

- The rotator comes with a disk to be holder
- Electronic adjustment of speed and time
- LCD displays for speed and time adjustment
- Speed range from 10 to 70rpm
- Rolling action, gives gentle but effective mixing
- Adjustable mixing angle between 0 and 90°
- Used with a wide variety of accessories




MX-RL-Pro LCD Digital Rotator

Features:

- The rotator comes with a rotisserie to be holder
- Electronic adjustment of speed and timer
- LCD displays speed and time adjustment
- Speed range from 10 to 70rpm
- End-over-end action, gives gentle but effective mixing
- Used with a wide variety of accessories

MX-RD-Pro

With rotisserie accessory

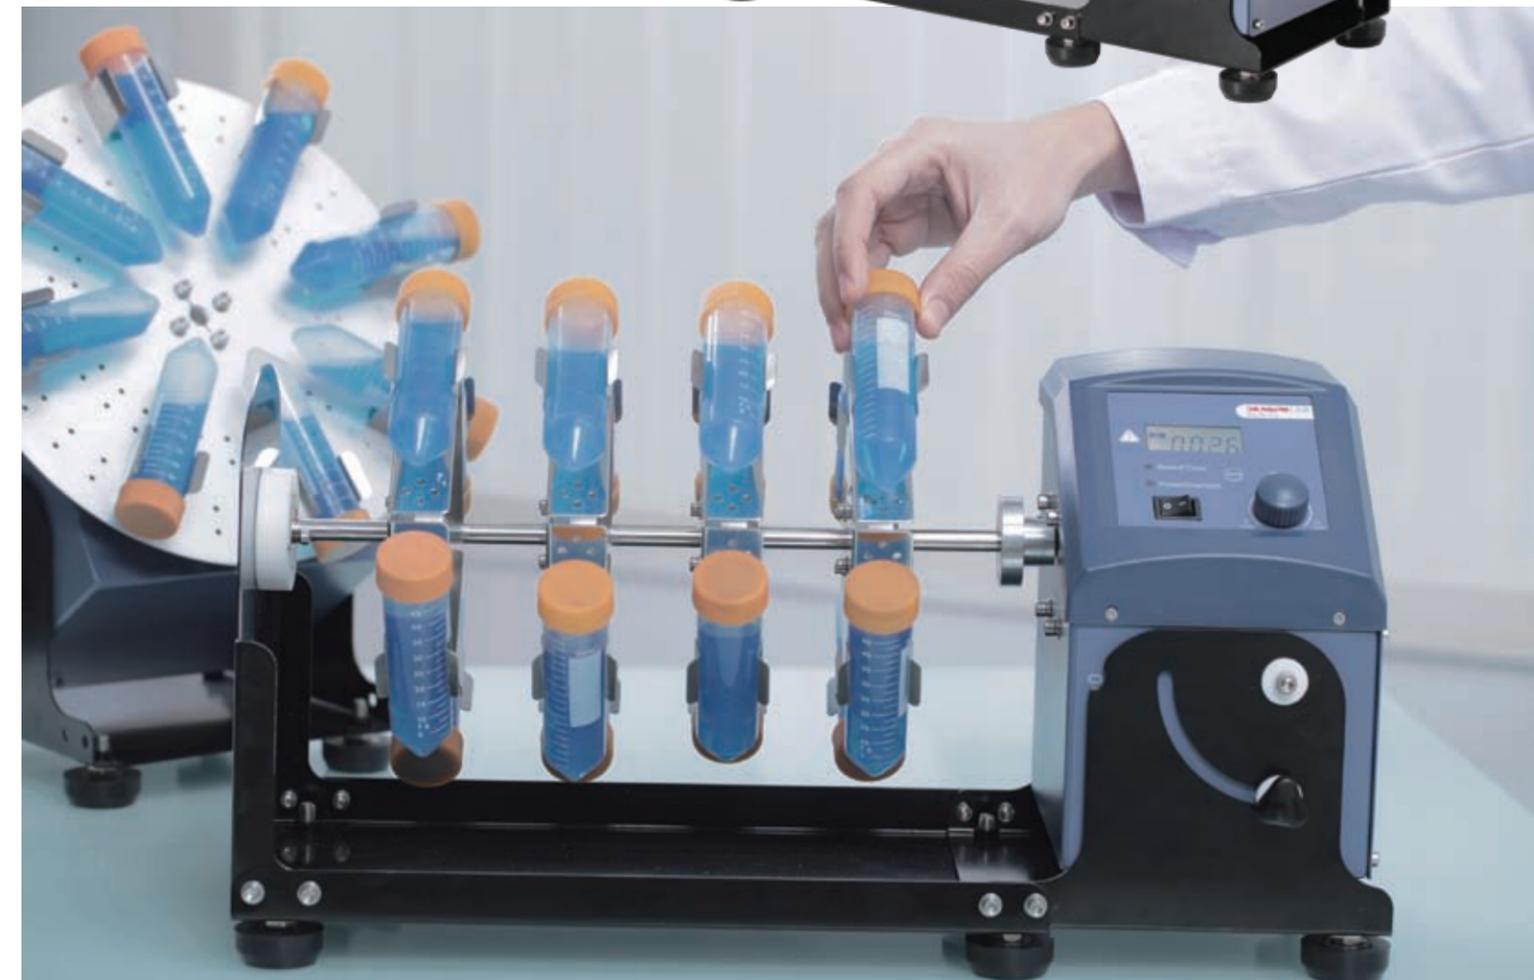

Accessories



Cat. No:18900160
Used for MX-RD-Pro
Disk accessory, for 1.5mL x
60 centrifuge tubes holder



Cat. No:18900161
Used for MX-RD-Pro
Disk accessory, 15mL x 16
centrifuge tubes holder



Cat. No:18900162
Used for MX-RD-Pro
Disk accessory, 50mL x 8
centrifuge tubes holder



Cat. No:18900140
Disk support rods,
4 pcs, use with disk
accessories



Cat. No:18900142
Used for MX-RL-Pro
Rotisserie accessory, for
1.5mL x 48 centrifuge tubes
held horizontally



Cat. No:18900143
Used for MX-RL-Pro
Rotisserie accessory, for
15mL x 24 centrifuge
tubes held horizontally



Cat. No:18900144
Used for MX-RL-Pro
Rotisserie accessory, for
50mL x 24 centrifuge
tubes held horizontally



Cat. No:18900145
Used for MX-RL-Pro
Rotisserie accessory, for
1.5mL x 32 centrifuge
tubes held vertically



Cat. No:18900146
Used for MX-RL-Pro
Rotisserie accessory, for
15mL x 16 centrifuge
tubes held vertically



Cat. No:18900147
Used for MX-RL-Pro
Rotisserie accessory, for
50mL x 16 centrifuge
tubes held vertically



	MX-RD-Pro / MX-RL-Pro	MX-RD-E / MX-RL-E
Voltage [VAC]	100-240	100-240
Frequency [Hz]	50/60	50/60
Power [W]	40	20
Motor type	DC motor	DC motor
Tilt angle [o]	0-90	90
Speed range [rpm]	10-70	0-80
Speed display	LCD	-
Timer	Yes	-
Timer display	LCD	-
Time setting range [min]	1-1199	-
Operation type	Continuous / timed operation	Continuous
Dimensions [DxWxH mm]	220x510x260(MX-RL-Pro) 280x210x300(MX-RD-Pro)	150x530x190(MX-RL-E) 300x220x310(MX-RD-E)
Weight [kg]	8	1.7(MX-RL-E) 2.0(MX-RD-E)
Permissible ambient temperature [°C]	5-40	5-40
Permissible relative humidity	80%	80%
Protection class acc. To DIN EN60529	IP21	IP21

**MX-RL-E / MX-RD-E
Classic Rotator**

Features:

- Give gentle but effective mixing of biological samples
- Compact space-saving design fits easily in the incubator
- End-over-end or rolling action, gives gentle but effective mixing
- Used with a wide variety of accessories, for micro tubes with a volume range of 1.5mL-50mL
- Adjustable speed range of 0 to 80 rpm

NEW



MX-RD-E



MX-RL-E



Used for MX-RL-E/MX-RD-E
Disk/Rotisserie accessory, for
1.5mL, 15mL and 50mL
centrifuge tubes



Connect With Us

