


NEW ASPIRET



NEW OPTIONAL CASTOR TROLLEY (REF. 27730)
NUOVO CARRELLO SU RICHIESTA (COD. 27730)

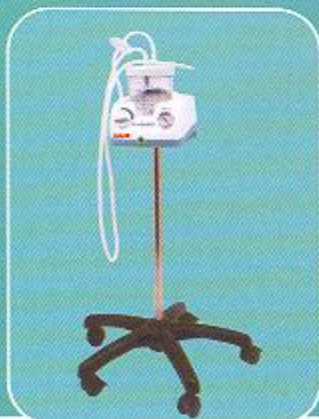

**NEW
DESIGN
RETYLING**
AVAILABLE FROM
FEBRUARY 2008
DISPONIBILE DA
FEBBRAIO 2008

CE 0123 ISO 10079-1: HIGH VACUUM / LOW FLOW

5

TECHNICAL SPECIFICATIONS

Power Feeding other voltages available upon request	230V-50Hz
Max Vacuum - adjustable	-0.75 Bar / -75kPa / -563 mmHg
Max free air flow rate	15 l/min
Power consumption	184 VA
Fuse	1 x 1.6 A 250V
Intermittent duty cycle at 35°C and 110% operating voltage	20 ON / 40 OFF
Weight	Lbs 4.83 - Kg 2.20
Size	In 9.95" x 7.48" x 6.50" - mm 255 x 190 x 165
Years of Warranty	2
Shipping carton	4
Manufacturing	100% in Italy

CARATTERISTICHE TECNICHE

Alimentazione altri voltaggi disponibili su richiesta
Aspirazione Max - regolabile
Flusso d'aria libero
Potenza assorbita
Fusibile
Funzionamento intermittente a 35°C e 110% tensione di funzionamento
Peso
Dimensioni
Anni Garanzia
Cartone di spedizione
Fabbricazione

CONFIGURATIONS

with AUTOCLAVABLE JAR* with overflow valve system, antibacterial and hydrophobic filter, complete set of tubes 6x10 mm, conical connector for probes.

* with 1000 ml autoclavable jar: RE 310001

* with 2000 ml autoclavable jar: RE 310001/01

con VASO AUTOCLAVABILE* con valvola di troppo pieno, filtro antibatterico ed idrofobico, set completo di tubi 6x10 mm, connettore conico per sonde.

* con vaso autoclavabile da 1000 ml: RE 310001

* con vaso autoclavabile da 2000 ml: RE 310001/01

VERSIONI

SURGICAL
SUCTION
UNITS

سوماتكو
SOMATCO 
www.somatco.com

Connect With Us



CA-MI