


# ELECTRO-ACUPUNCTURE

**IC-4107**

## FOUR-CHANNEL ELECTRO-ACUPUNCTURE WITH POINT DETECTOR

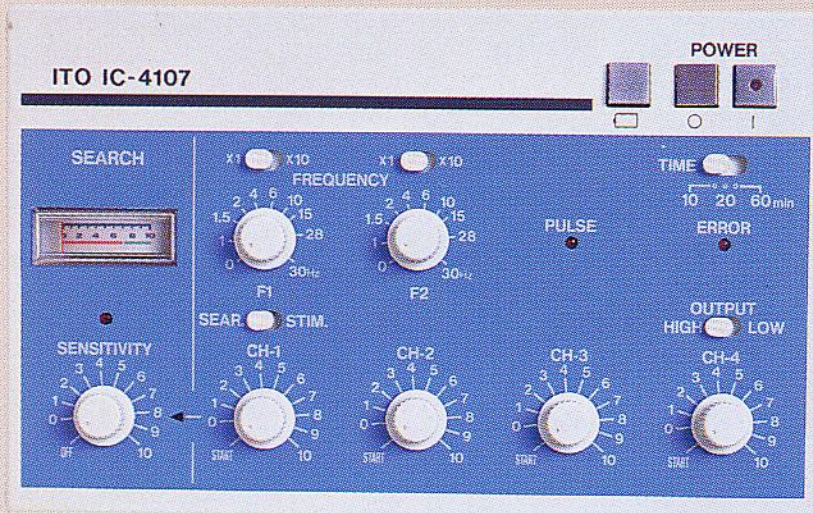

- The latest development—most advanced unit on the market of compact electro-acupuncture
- Broad pulse rate range: from 1 to 300 Hz
- Three stimulation modes—Constant, Intermittent & Modulated
- Practical search electrode and search function
- Built-in timer: 10 minutes, 20 minutes and 60 minutes
- Automatic polarity conversion
- High/low intensity switching
- Battery monitor indicating residual power
- No output cross-over

### SPECIFICATIONS:

**Power:** Six AAA batteries

**Output Current/voltage:** High/Low, switchable  
Max. 3.5 mA  $\pm$  30%/15 V  $\pm$  25%

**Output Channels:** 4 channels + 1 channel for point search

**Pulse Rate:** 1 ~ 300 Hz, variable

**Pulse Width:** 55  $\mu$ s  $\pm$  25% at 300 Hz

**Stimulation Mode:** Constant, intermittent and modulated

**Point Detection and Stimulation:** Indicated by sound and meter.

**Timer:** 10, 20 and 60 minutes

**Safety:** ● Zero output start ● No output cross-over

**Size & Weight:** 200 x 126 x 35 mm, 450 g