


BASIC

AUTOCLAVE A VAPORE D'ACQUA

WATER STEAM AUTOCLAVE

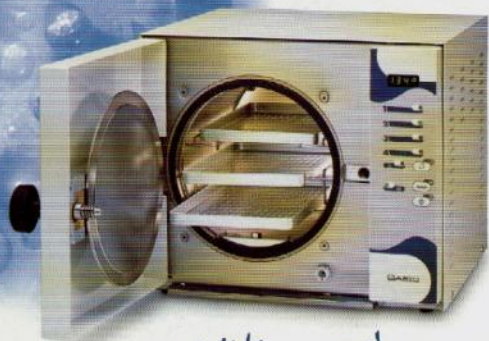

*L'Esperienza più Solida
per una Qualità Superiore!*

- Capacità 17 litri
- Gestione a microprocessore
Per monitoraggio
dei parametri
- Funzionamento automatico
- Vuoto iniziale termodinamico
Per espulsione delle
sacche d'aria dalla camera
- Sistema di asciugatura termico
- Display digitale
- Incassabile
- Autonomia serbatoio di 15 cicli
- Carico acqua in camera
semiautomatica per caduta
- Dispositivi di sicurezza:
 - micro chiusura porta
 - valvola di sicurezza
 - termostato di sicurezza
 - allarmi
- Possibilità di porta vassoi
a 5 scomparti

● TABELLA DEI CICLI 4 CICLI

- 2 cicli per carichi sciolti
134°C - 4 min.
121°C - 20 min.
- 2 cicli per carichi imbustati
134°C - 12 min.
121°C - 30 min.

● KIT DI DOTAZIONE

- 3 vassoi in alluminio anodizzato
- 1 supporto inox a 3 scomparti
- 1 estrattore vassoi
- 1 tanica per il caricamento dell'acqua
completa di tubo con attacco rapido
- 1 tubo di scarico con attacco rapido

● CARATTERISTICHE TECNICHE

- Dimensioni esterne
L 460 mm - P 480 mm - H 400 mm
- Dimensione camera
D 245 mm - P 350 mm
- Potenza 1300 W

- Capacity 17 litres
- Fully microprocessed management
For a constant monitoring
of parameters
- Automatic functioning
- Thermodynamic initial vacuum
For precise expulsion
of air pockets from the chamber
- Thermal drying system
- Digital display
- It can be incorporated into furniture
- 15 cycles endurance tank
- Water charge in semi-automatic
chamber for dropping
- Safety mechanisms:
 - micro door closure
 - safety valve
 - safety thermostat
 - alarms
- Possibility to have a 5
compartments tray holder

● CYCLES LIST 4 CYCLES

- 2 cycles for unwrapped loads
134°C - 4 min.
121°C - 20 min.
- 2 cycles for wrapped loads
134°C - 12 min.
121°C - 30 min.

● STANDARD KIT

- 3 trays in anodised aluminium
- A 3-compartment stainless
steel support
- 1 tray remover
- 1 water filling tank together with
one pipe + quick connection
- 1 waste pipe with quick connection

● TECHNICAL FEATURES

- External dimensions
L 460 mm - P 480 mm - H 400 mm
- Chamber dimensions
D 245 mm - P 350 mm
- Power 1300 W

CE 93/42 CEE
0051 MEDICAL DEVICES

CSQ
MED

UNI CEI EN 46002



mocom

Sistemi innovativi di sterilizzazione

*the Solid Experience
for a Higher Quality!*